


A3

REV	ECN NO	DESCRIPTION	DATE	APPD
X1		Initial Edition	2014.12.19	Nike Xiang

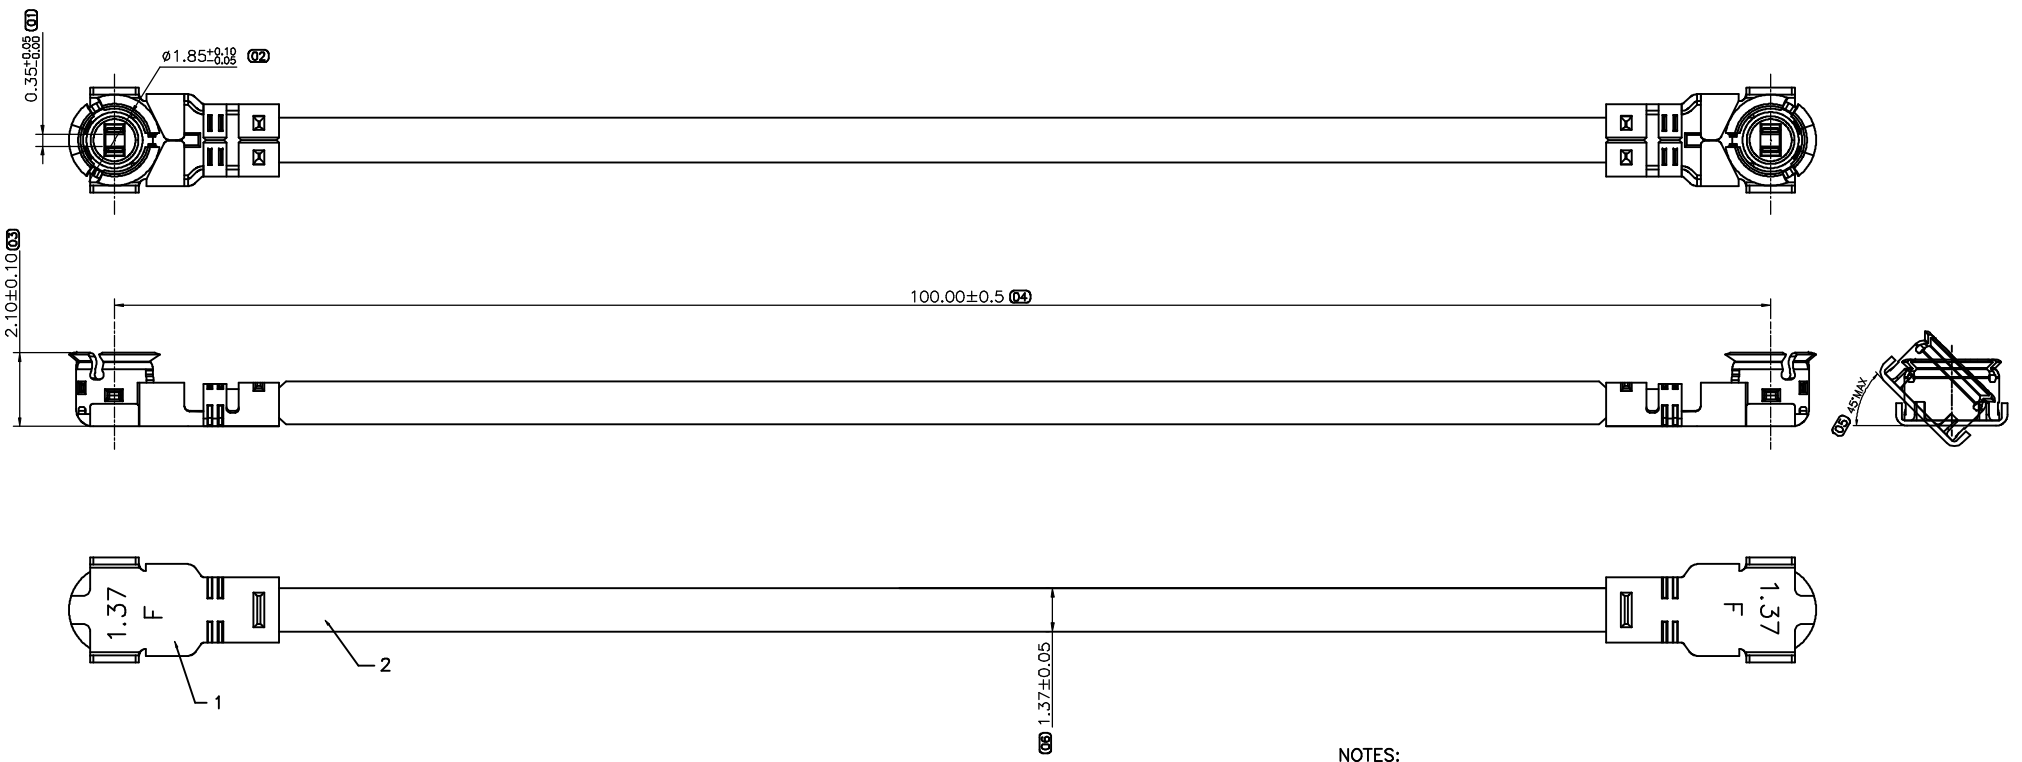

- NOTES:
- Technology Parameter:
    - 1-1.Voltage Rating: 60VAC(R.M.S).
    - 1-2.Frequency Rating: DC0.1~6GHz.
    - 1-3.Nominal Characteristic Impedance: 50 ohms.
    - 1-4.Operating Temperature Range: -40°C~+90°C
    - 1-5.Operating Humidity: 95%R.H.MAX
  - Electric Performance:
    - 2-1. Insulation Resistance: 500M ohms.
    - 2-2. Contact Resistance.
      - 2-2-1. Inner Contact: 20mahms Max.
      - 2-2-2. Outer Contact: 10mahms Max.
    - 2-3. Withstand Voltage: 200V AC 1minute
    - 2-4. VSWR: 1.3Max. 500M~3GHz
  - Mechanism Performance
    - 3-1. Durability: 30 Cycles
  - The Product is Compliant With FAF Environment Procedure Requirement

2	CABLE (ø1.37,Colour:BLACK)	1	V.000C8-001-000
1	RF 2.5H CONNECTOR PLUG	2	7.001A2-001-1RB
ITEM	DESCRIPTION	Q'TY	P/N

EXTEND USE		TITLE		FAF.	
RF 2.5H Connector Plug+Cable		UNIT	mm	7.024AJ CONN. Customer Drawing	
GENERAL TOLERANCE (Q)		MATERIAL	APPD	DWG NO	
DIMENSION		QTY	CHD	C-7.024AJ	
ANGLES		FINISHED	DRN	P/N:	
. ±0.30	. ±3'	Libin Jin 2014.12.19		7.024AJ-019-1B0	
.0 ±0.25	.0 ±2'	David Wang 2014.12.19		SHEET	
.00 ±0.20	.00 ±1'	2014.12.19		1/1	
.000 ±0.10				SCALE	
				1:1	
				REV	
				X1	